


FDHIGHV

DATA SHEET

WHAT'S IN THE BOX

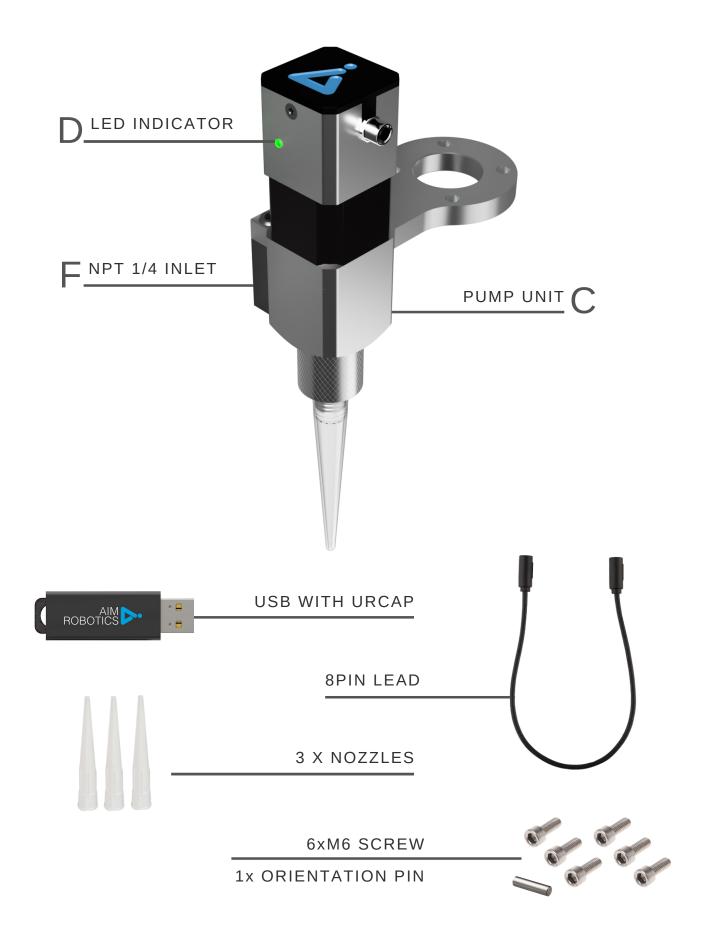

TECHNICAL DATA

FDhighV FEATURES

- Use with external feeding system
- Recommended for single-component medium to high viscosity fluids, approximate 50.000-100.000.000cps, depending on screw type and feeding system

Model # FDhighV

URCap version ≥3.2

Mechanical interface: ISO 9409-1, type 50-4-M6

NPT 1/4

Electrical interface: 8-pole M8


Digital interfaces: URCap, PolyScope ≥5.5


URCap, API ≥1.8

RS485 24V I/O

Weight: 0.8kg

Dimensions: 65 x 130 x 170mm





No air

Accurate dispensing

Easy installation and Setup

- Up and running in 10 minutes
- Specially designed software

Fully integrated with Universal Robots

Single connection utilizing the M8 8pin connector

AIM ROBOTICS APS

DENMARK

+45 31 51 55 11



AIM-ROBOTICS.COM



SALES@AIM-ROBOTICS.COM







